

type number: **VS 41X45_F**

thickness of metal sheet: 5 mm

product description: The support part is used to attach the threaded rod to the at an angle of 45°.

surface finish: Hot Dip Galvanized, average zinc-layer 55 µm (min. 45 µm)




sales amount: á 1 pc

classification: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

products are approved for standard constructions

storage: EN 60721-3-1

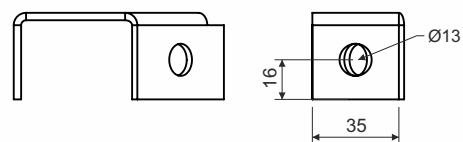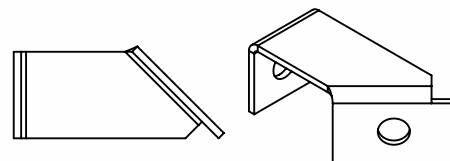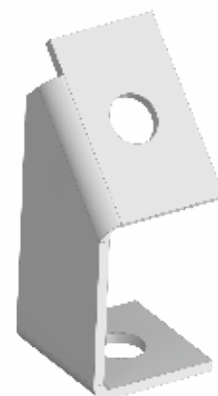

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



VS 41X45



cardboard